


ANCHOR DIMENSION

BBI-SV (FOR MULTI-PURPOSE)

Anchor Weight (kg)	Dimensions in mm				
	A	B	C	D	E
1,000	2429	2654	1559	2023	737
1,500	2774	3038	1785	2316	843
3,000	3493	3828	2249	2918	1063
5,000	4120	4538	2667	3460	1260
7,000	4602	5077	2983	3871	1409
9,000	5012	5521	3244	4209	1533
12,000	5516	6076	3570	4632	1687
15,000	5942	6545	3846	4990	1817
20,000	6372	6986	4100	5324	2048
30,000	7289	7997	4694	6094	2345

Remark: Approximate Weight and Dimension for reference only.

- Advance design to reach the absolute highest capacity.
- Faster penetration, shorter drag distance and enlarged fluke for higher holding capacity.
- Stabilizes keep the Anchor orientated in the soil.
- Padeyes are placed for easier retrieval the Anchor.
- Adjustable fluke / shank angle 32-50.
- Weld-Fabricated, Extremely Rugged.
- Very Good in Sandy and Soft Environments.
- Weight from 1,000Kgs to 30,000Kgs.

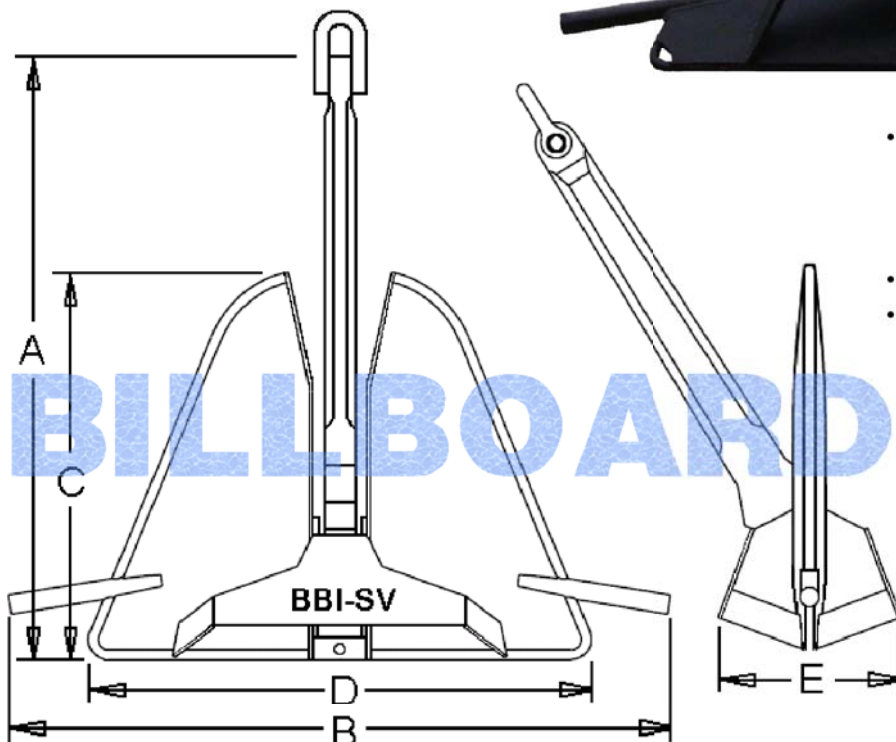

- An extremely versatile Anchor for Permanent or semi-permanent Mooring system and various soil Condition.
- For SPM, MODU, FPSO, FSO
- Dredging, Barges, Crane Barge.